




DOCKWISE YACHT TRANSPORT FLOAT-ON/FLOAT-OFF PROCEDURE



- 1 Arrival of yacht carrier in Port.
- 2 Crew has prepared yacht carrier's deck.
- 3 Welding of keel blocks to yacht carrier's deck.
- 4 Keel block lay-out on deck ready.
- 5 Yacht carrier submersing.
- 6 Yachts on stand-by on VHF and ready for float-on.
- 7 Loading master coordinates sail-in and positioning.
- 8 Crew assists with line handling.
- 9 All yachts have entered the carrier's dock bay.
- 10 Divers check position of yachts over keel blocks and put temporary supports in place.

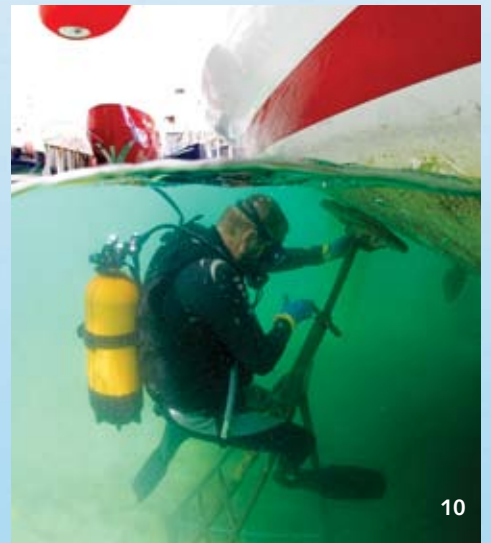



- 11 De-ballasting to original waterline.
- 12 Chine-supports check and welding to yacht carrier's deck.
- 13 Yachts safely secured inside yacht carrier's dock bay.
- 14 Crew assisting large yachts with electrical hook-up.
- 15 When all yachts are secured, captain sets sail for new horizons.
- 16 Once at sea, yacht crew may perform maintenance work.
- 17 Upon arrival at destination, the yacht carrier ballasts down, allowing yachts to float-off... ready to begin the next leg of the odyssey.



WORLD CLASS YACHT LOGISTICS

Dockwise Yacht Transport USA
1535 S.E. 17th St, Suite 200
Ft. Lauderdale, Florida 33316
Tel.: + 1 954 - 525 8707
Fax: + 1 954 - 525 8711
E-mail: dyt.usa@dockwise-yt.com

Dockwise Yacht Transport Europe Srl
Corso Paganini, 39/2
16125 Genoa, Italy
Tel.: +39 010 278 9411
Fax: +39 069 159 4458
E-mail: dyt.europe@dockwise-yt.com

Dockwise Yacht Transport France
Port Azur 3
79 Avenue des Frères Roustan
06220 Golfe Juan
Tel.: + 33 [0]493 - 931 856
Fax: + 33 [0]493 - 491 539
E-mail: dyt.france@dockwise-yt.com

www.yacht-transport.com